
ASSEMBLY INSTRUCTIONS

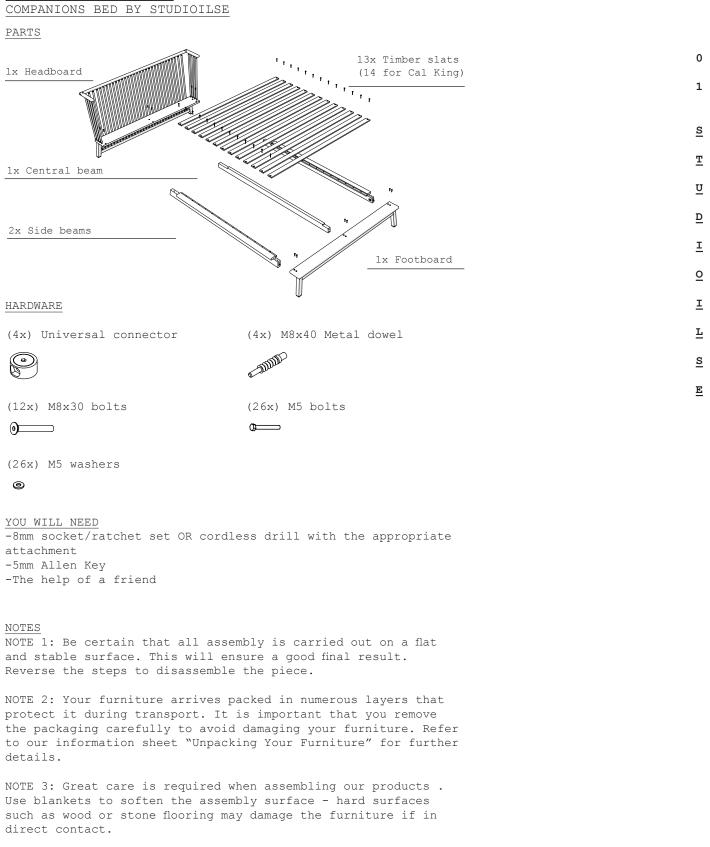

NOTE 4: We advise that assembly and disassembly of De La Espada furniture is undertaken by a minimum of 2 people.

NOTE 5: When screwing in bolts, tighten well, but be sure NOT TO OVERTIGHTEN. This can cause the thread to strip thus resulting in a poor connection.


NOTE 6: All mating parts are numbered so they correspond to the appropriate part around the frame of the bed. you will ensure the best possible fit if all parts are mated with the corresponding numbered parts. While you work, be sure all connections are flush with no gaps.

INSTRUCTIONS

1. ATTACH HEADBOARD TO CENTRAL BEAM AND SIDEBEAMS

a) Unpack components and lay them out so they are in the correct orientation. Check for number markings.

b) Place cutout of central beam onto the cutout on the headbeam, by slotting the wooden dowels into the corresponding holes.

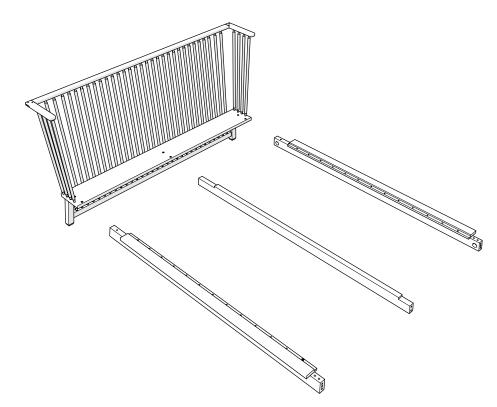

0

2

s

т

Ū

D

Ξ


<u>o</u>

Ι


Ŀ

S

c) Insert a Universal Connector into the rebate in the headboard end of one sidebeam, and place a metal dowel into the corresponding pre-drilled hole in the headboard. Guide the metal dowel into the Universal Connector and tighten firmly with an Allen Key. Repeat this procedure for the second sidebeam.

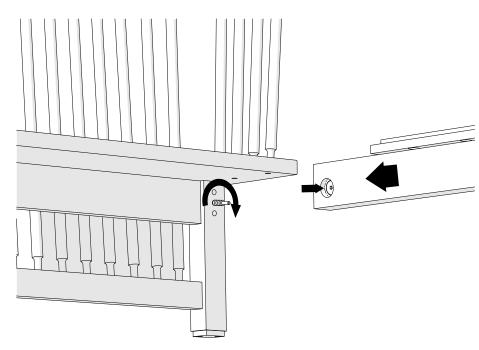

e) Insert 2x $\rm M8x30$ bolts into the headboard base at each connection point and tighten with an Allen Key.

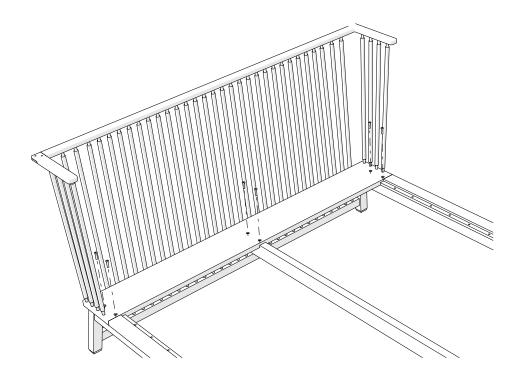

D

티미

0


3

비 이 비 니


<u>s</u>


2. ATTACH FOOTBOARD

a) Prepare to attach the footboard by placing it in the correct orientation.

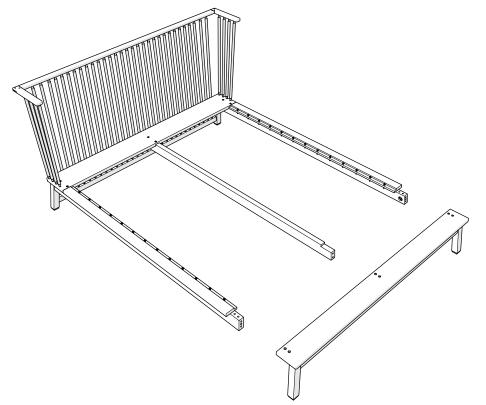

b) Insert a Universal Connector into the rebate in the footboard end of one sidebeam, and place a metal dowel into the corresponding pre-drilled hole in the footboard. Guide the metal dowel into the Universal Connector and tighten firmly with an Allen Key. Repeat this procedure for the second sidebeam.





SALES@DELAESPADA.COM DELAESPADA.COM

0

4

s

Т

U

D

Ι


<u>o</u>

Ī


Ŀ

s

c) The construction should now look like this.

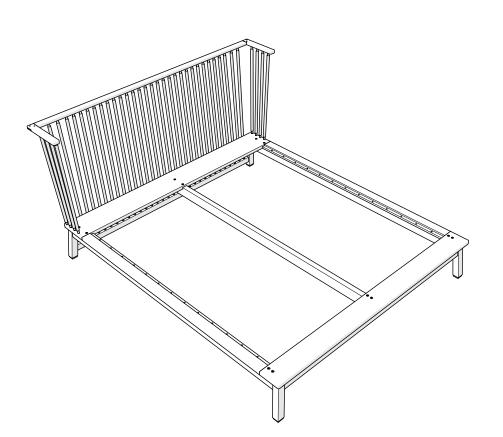

d) Insert 2x M8x30 bolts into the footboard at each connection point and tighten with an Allen Key.

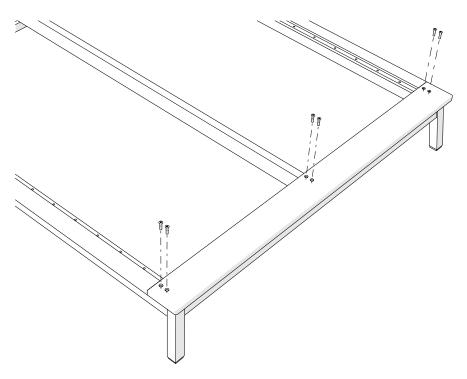

SALES@DELAESPADA.COM DELAESPADA.COM

D

0

5

s

T

U

D

ī

<u>o</u>

Ī


Ŀ

s

3. ATTACH THE TIMBER SLATS TO THE PLATFORM BASE

a) Space out the bed slats so they are aligned with the corresponding holes on the timber lip on the inner face of the side beams. The underside of the each slat has a threaded sleeve fixed inside. If the sleeve drops out, there are spares you can use. The top of each slat has a recess for the washer.

b) Place a washer in the recess of each slat and insert an M5 bolt through the slat and into the sidebeam. Using a cordless drill or socket set, tighten the bolts. Tighten the slats well, so they are not wobbly, but be very careful not to overtighten.

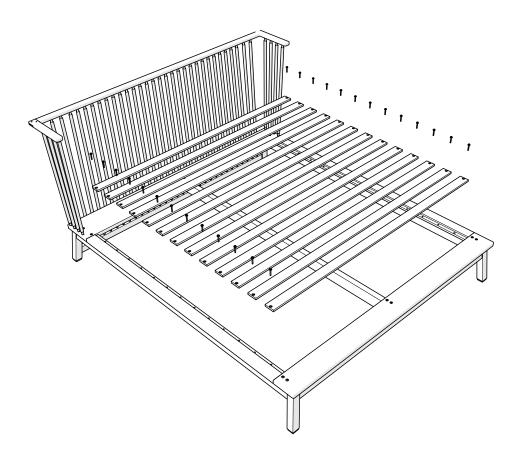

0

6

s

Τ

U

D

Ι

<u>o</u>

Ξ

Ŀ

S

c) The assembly is now complete and the bed is ready to receive a mattress.

