


AJ GARDEN BOLLARD

This outdoor lamp emits a pleasant fully shaded downward directed, glare-free light. It is available in two different heights, and has a fixed head and the inside of the shade is painted white to ensure a soft, pleasant reflection of light. The shape of the shade provides superior lighting, allowing an optimal view of the surroundings. The garden bollard can be fitted with three different installation types namely a base plate, a spike or an anchor.



Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.



Product info

Information

The adapter is positioned externally from the fixture and can run up to 6 bollards. Maximum distance to last bollard is 30m. Spike: Plug and play. Let the enclosed cables run over the ground. Uses standard cables and connectors which are supplied. Anchor/Base: Requires certified electrician. Use installation tube for inground installation, with enclosed cables running inside, for legal fixed installation. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

Mounting

The adapter is positioned externally from the bollard and can run up to 6 bollards. Maximum distance to last bollard is 30m. Length of enclosed cables: 5m. Stem: Ø12 mm. Mounting with spike unit: (Plug and Play). Put the spike into the ground. Let the enclosed cables run over the ground. The bollard is connected to adapter using standard plugs delivered with the fixture. Mounting with anchor unit: (Certified electrician). Fixed in concrete. Use installation tubes for inground installation, with enclosed cables running inside, for legal fixed installation. Requires installation by certified electrician. Mounting with baseplate: (Certified electrician). For surface mounting. Use installation tube for inground installation, with enclosed cables running inside, for legal fixed installation. Requires installation by certified electrician.

Finish

Outside: Black, textured surface, powder coated. Inside: White, wet paint.

Materials

Head: Cast aluminium. Stem and base plate: Stainless steel. Spike: Cast aluminium with ABS housing. Anchor: Steel. Diffuser: Injection molded opal PC.

Sizes and weights

Width x Height x Length (mm) | 90 x 954 x 90 Max 3.6 kg | 90 x 504 x 90 Max 2.9 kg

Class


Ingress protection: IP 65. Electric shock protection III. IK06

Light source

LED 2700K 6.5W
Lumen: 454

Information

The adapter is positioned externally from the fixture and can run up to 6 bollards. Maximum distance to last bollard is 30m. Spike: Plug and play. Let the enclosed cables run over the ground. Uses standard cables and connectors which are supplied. Anchor/Base: Requires certified electrician. Use installation tube for inground installation, with enclosed cables running inside, for legal fixed installation. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

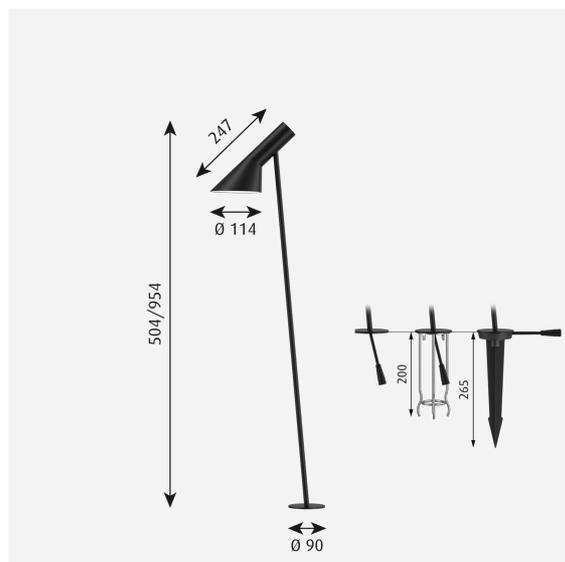

Product family



AJ Table



AJ Floor



AJ Wall



AJ 50 Wall



AJ Mini Table



AJ Royal



Product variants

| Dimension | Mounting | Light source | Lumen |
|----------------------|----------------------------|----------------|-------|
| LONG | Anchor and w/adaptor | LED 2700K 6.5W | 454 |
| SHORT | Anchor and wo/adaptor | LED 3000K 6.5W | 524 |
| AJ Oxford Table Lamp | Base and w/adaptor | LED 4000K 6.5W | |
| | Base and wo/adaptor | | |
| | Spike and w/adaptor | | |
| | Spike w/o adap w/connector | | |

Design

Arne Jacobsen

Weight

Min: 2.05 kg Max: 3.63 kg

Dimensions


LONG, SHORT

Finish


Black texture

Light distribution diagrams


Cartesian

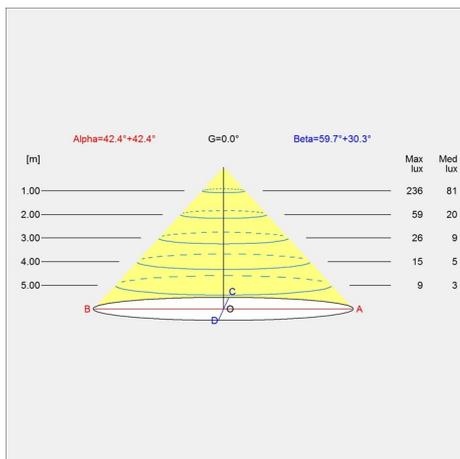

Isolux

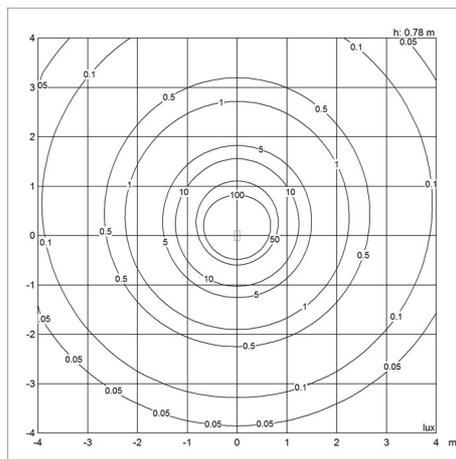

Polar

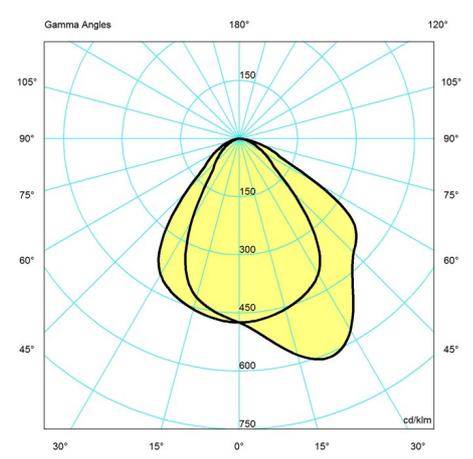

Spare parts & accessories

AJ Garden Bollard

| Product | Variant number |
|-------------------------------------|----------------|
| Garden t-connector | 5747405303 |
| Garden extension cable 5M | 5747405316 |
| AJ GARDEN ANCHOR + SCREWS/WASHERS | 5747406195 |
| AJ GARDEN SPIKE+BASE BLK + SCREWS | 5747406205 |
| AJ GARDEN SPARE BASE SCREWS (4 pcs) | 5747406218 |
| AJ GARDEN DIFFUSER KIT | 5747407055 |