

Flax 63% Wool 29% Nylon 5% Cotton 3%

Lightfastness

ISO 5

Abrasion

100,000 rubs Martindale method

Maintenance



02TOS Beech



16TOS Moss



14TOS Ice







24TOS Chestnut



18TOS Denim



22TOS Carnelian



09TOS Anthracite



Designed by Dorothy Cosonas

Content

Wool 38% Cotton 28% Acrylic 28% Polyester 6%

Flame Resistance

California Technical Bulletin 117 NFPA 260 (UFAC Class 1) EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)

Lightfastness

ISO 5

Abrasion

70,000 rubs Martindale method

Maintenance



K108010 Orchard



K10808 Parchment



K10804 Paprika




K10801 Sunflower



K10805 Scarlet



K108011 Lion



K108013 Dragon



Rivington



Designed by Dorothy Cosonas

Content

Wool 38% Cotton 28% Acrylic 28% Polyester 6%

Flame Resistance

California Technical Bulletin 117 NFPA 260 (UFAC Class 1) EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)


Lightfastness

ISO 5

Abrasion

70,000 rubs Martindale method


Maintenance




K10802 Sapphire



K10809 Ash Gray



K108014 Eclipse




K108012 Palm



K10806 Aubergine



K10803 Spruce



K10807 Bittersweet





Fleece wool 96% Nylon 4%


Lightfastness

ISO 5/8


Abrasion

90,000 rubs DIN EN ISO 12947-2

Maintenance

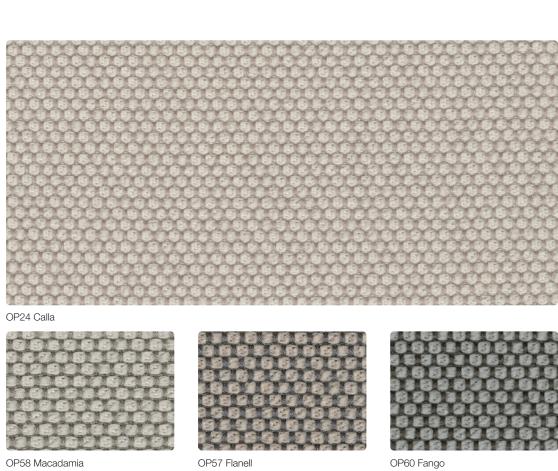














OP64 Prime



OP69 Delft

OP70 Navy

OP71 Indio



Acetate 57% Polyester 37% Viscose 6%

Lightfastness

ISO 4/5

Abrasion

32,000 rubs Martindale method

Maintenance



001HER Ivory



003HER Light Taupe



021HER Powder





029HER Moss



031HER Gold



018HER Olive Green



016HER Emerald Green



024HER Sky/Blue



023HER Night Blue



011HER Dark Grey



012HER Grey



Cotton 52% Viscose 22% Acrylic 14% Flax 6% Nylon 3% Polyester 3%


Lightfastness

ISO 4/5

Abrasion

50,000 rubs Martindale method

Maintenance

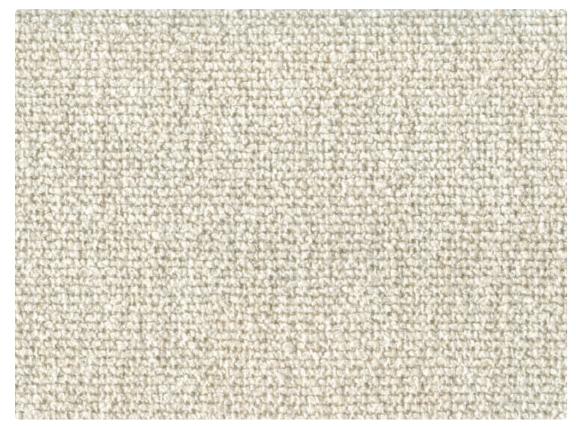

04HL Ivory



05HL Silver



15HL Grey



07HL Dark Grey



13HL Brown/White




12HL Red Brick




03HL Green/White



01HL Olive

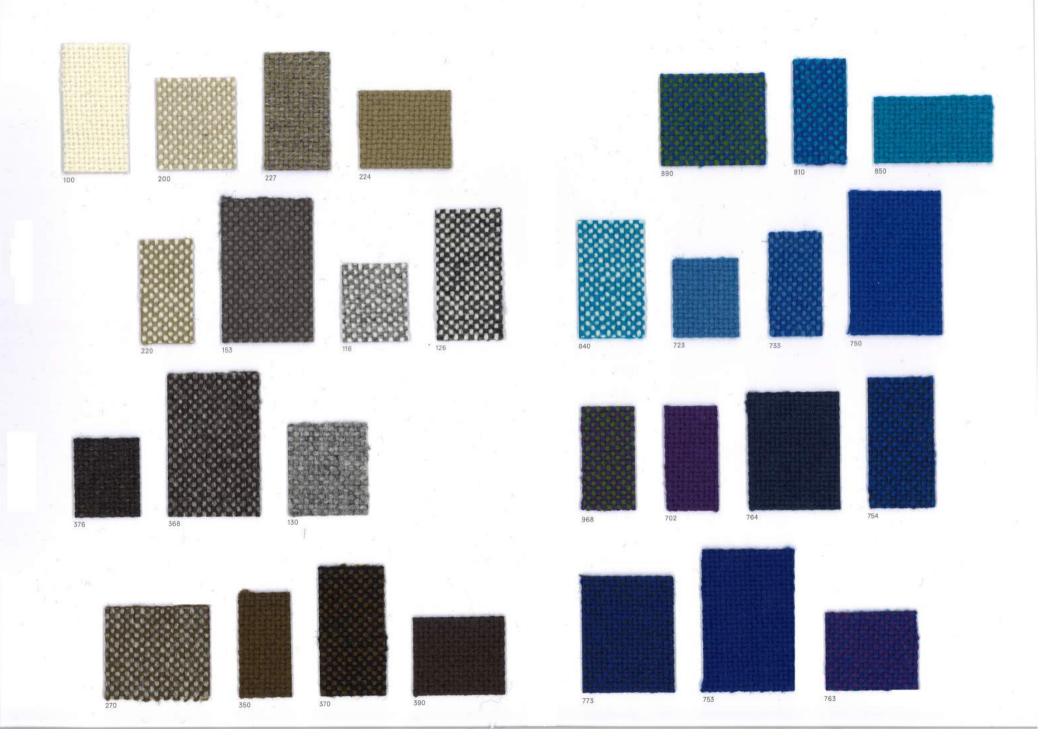

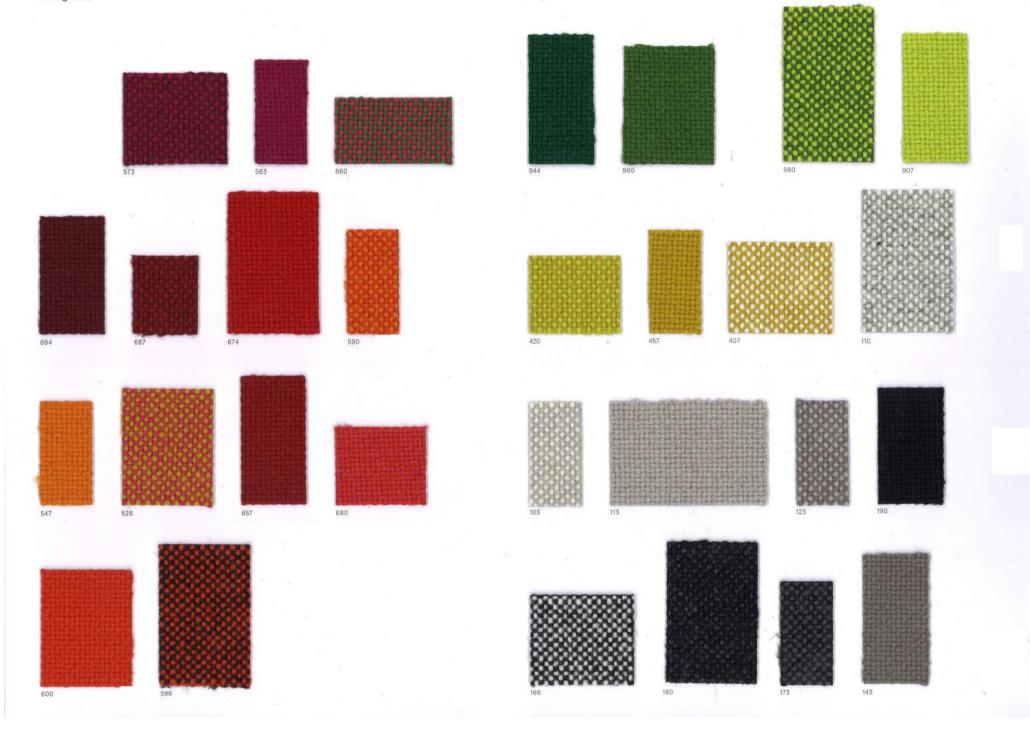

Fiord ()



Content Cotton 100%

COLLOIT 100 /

Lightfastness ISO 4/5

100 4/0

Abrasion

50,000 rubs Martindale method

Maintenance



171EVA Avio



172EVA Steel



140EVA Sea Green



149EVA Ocean



170EVA Night Blue



125EVA Rose



177EVA Beige




Content Cotton 100%

Lightfastness ISO 4/5

Abrasion 50,000 rubs Martindale method


MaintenanceClean with solvent-based cleaning agent



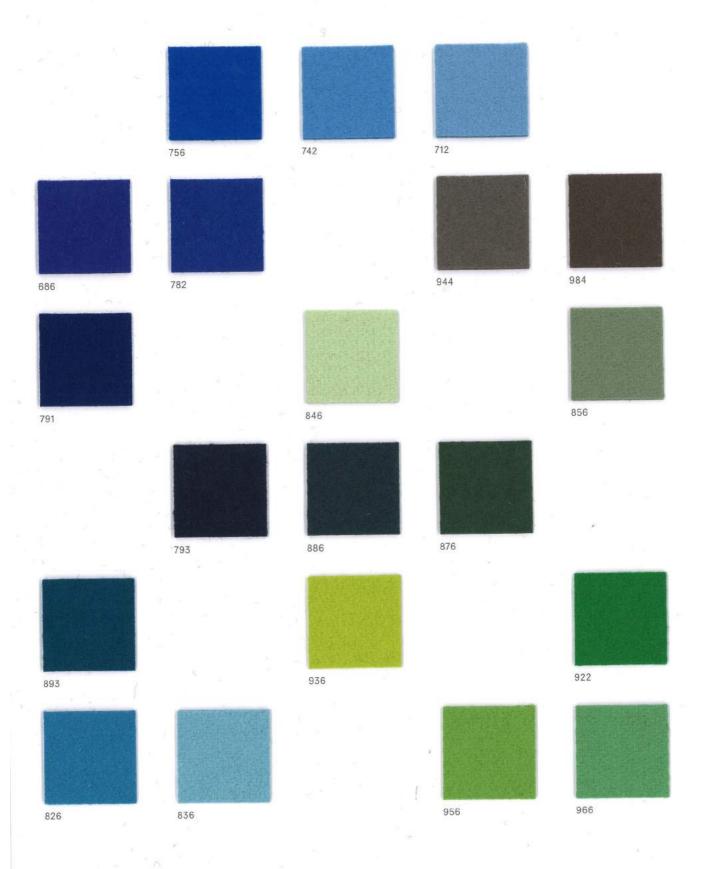



Divina 3

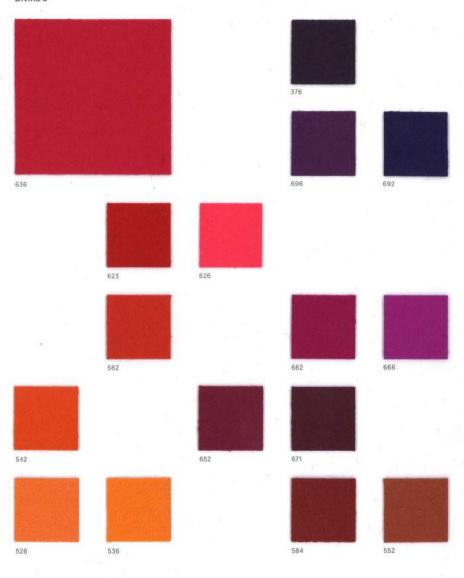



New wool 95% Polyamide 5%

Flame Resistance

FAR 25.853 (12 sec. vertical) CAL TB 117-2013 DIN 4102-1 B2 EN 13501-1 EN 1021-1 and -2 BS 5852:2006 (part 1) BS 5852:2006 (part 2) Crib 5 BKZ: 5.3 SN 198898 UNI 9175 (1 IM) IMO: 2014/90/EU/Marine Equipment Directive

Lightfastness

Min 5-8 EN ISO 105-B02

Maintenance

Dry clean




















RCR16 Pepper

RCR08 Black

RCR25 Asphalt







Please use this sample card as indicative, only. It is provided as a guide. There may be variations between this sample card and the real samples.



Cotton 38% Acrylic 24% Viscose 18% Wool 12% Nylon 2%

Flame Resistance

BS 5852:2006

Lightfastness

ISO 4/5

Abrasion

62,000 rubs Martindale method

Maintenance




01WE White



19WE Light Brown




18WE Red



14WE Blue




13WE Dark Grey



10WE Grey



03WE Light Grey



12WE Green



04WE Sand

Sahara

Knoll

Content


Linen 42% Cotton 32% Viscose 19%

Lightfastness ISO 4

Abrasion

60,000 rubs Martindale method

Maintenance

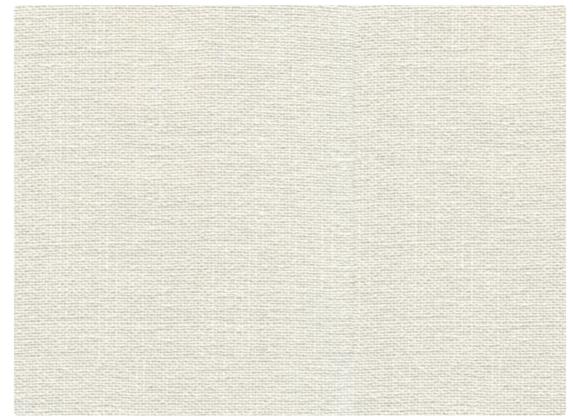


AH42 Almond



AH01 Linen




AH03 Sand




AH27 Elephant




AH04 Rope



AH21 Sage



AH24 Lake




AH43 Cupcake




Content Polyester 100%

Abrasion 50,000+ double rubs, Wyzenbeek method

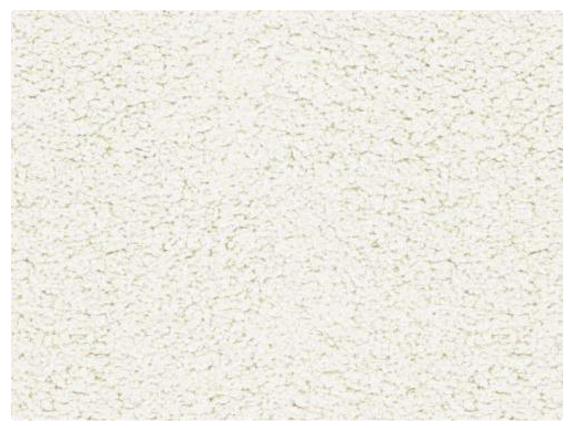

K24331 Cloud




K243312 Charcoal



K24333 Taupe



K243310 Bronze




K24332 Honey



K24335 Evergreen



K24339 Rubyss



K243313 Sable



Acrylic 43% Cotton 25% Polyester 15% Viscose 14% Wool 3%

Flame Resistance

California Technical Bulletin 117-2013 British Standard 5852: 1979 Part1 (cigarette & match)

Lightfastness


ISO 3/5

Abrasion

25,000 rubs Martindale method

Maintenance

Dry clean, only

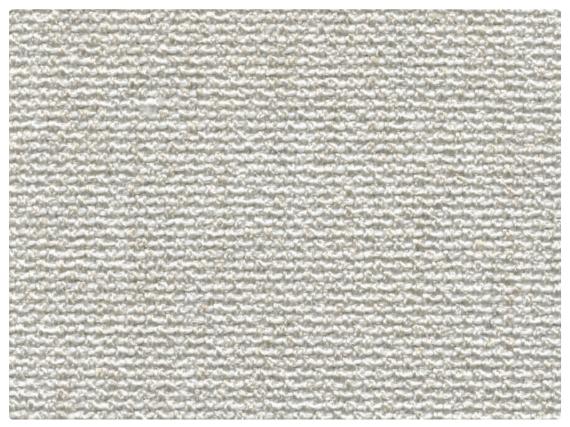

06PE Ivory



05PE Sand



04PE Taupe



02PE Brick



01PE Burgundy



03PE Lagoon



08PE Blue



09PE Dark Grey



07PE Light Grey



Cotton 20% Polyester 80%

Lightfastness ISO 5

Abrasion

100,000 rubs Martindale method

Maintenance



07H Ice



05H Olive




04H Moss




06H Light Grey



02H Grey



03H Dark Blue



01H Black



Acrylic 45% Cotton 19% Flax 12% Polyester 12% Viscose 12%

Lightfastness ISO 4/5

Abrasion


30,000 rubs Martindale method

Maintenance

Clean with solvent-based cleaning agent



01FED White

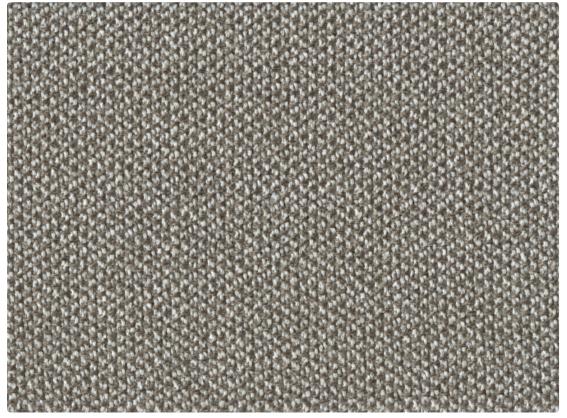

03FED Sand



Acrylic 47% Cotton 26% Flax 9% Polyester 9% Viscose 9%

Lightfastness

ISO 4/5

Abrasion

30,000 rubs Martindale method

Maintenance



65CRO Ivory







35CRO Brown

52CRO Bluish Green

14CRO Blue



Tonus 4







Trevira CS 100%

Flame Resistance

UNI 9177 - Classe 1 California TB 117:2013 EN 1021-1&2 BS 5852-Part 0-1 (C&M) IMO MSC 307(88) Annex 1 Part 7+8 NF P 92-503-507 M1 DIN 4102 B1 UNI 9175 - 1.IM NFPA 260:2019

Lightfastness


ISO 5


Abrasion

190,000 rubs Martindale method

Maintenance

Wet cleaning warp Shrinkage app. 2%

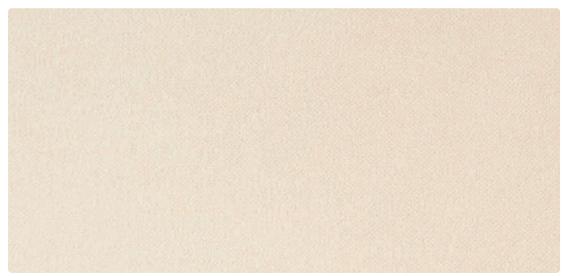

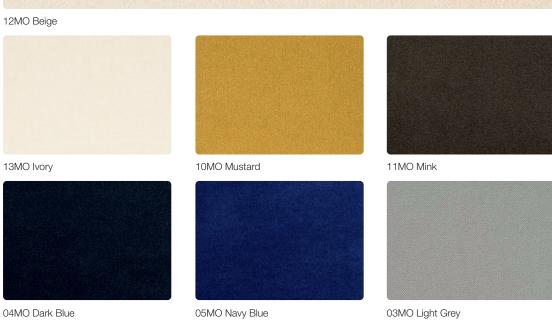



09MO Moss





07MO Burgundy



06MO Orange



02MO Dark Grey



01MO Black



Wool 100%

Flame Resistance

NFPA 260 (UFAC Class 1) EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)

Lightfastness

ISO 4

Abrasion

40,000 rubs Martindale method

Maintenance



K120613 Putty



K12061 Buff



K12064 Lime



K12062 Stucco



K12065 Olive



K12063 Celery



K12066 Gold





Wool 100%

Flame Resistance

NFPA 260 (UFAC Class 1) EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)

Lightfastness

ISO 4

Abrasion

40,000 rubs Martindale method

Maintenance



K12067 Orange



K120610 Red



K120616 Black



K12068 Melon



K120611 Admiral



K120614 Silver



K12069 Magenta



K120612 Navy



K120615 Charcoal



Wool 100%

Flame Resistance

NFPA 260 (UFAC Class 1) EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)


Lightfastness

ISO 4

Abrasion

40,000 rubs Martindale method

Maintenance

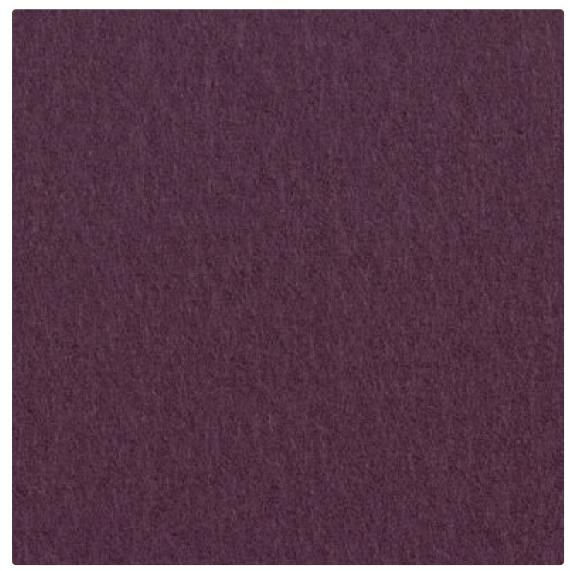

K120710 Grape



K12071 Ivory



K12072 Tan



K12073 Apple



K12074 Green



K12075 Canary



K12076 Tangerine





Content Wool 100%

Flame Resistance NFPA 260 (UFAC Class 1) EN1021 1/2 British Standard 5852:

1990 Source 5 (crib 5)

Lightfastness

ISO 4

Abrasion 40,000 rubs Martindale method

MaintenanceClean with solvent-based cleaning agent



K12077 Poppy



K12078 Pink



K12079 Rouge



K120711 Cadet



K120712 Baltic



K120713 Blue



K120714 Toast



K120715 Mocha




K120716 Carob



K120717 Pewter



K120718 Grey



K120719 Smoke



K120720 Tar



Cotton 100%

Lightfastness

ISO 4/5

Abrasion

80,000 rubs Martindale method

Maintenance





Viscose 56% Flax 18% Acrylic 18% Jute 8%

Lightfastness

ISO 4/5

Abrasion

30,000 rubs Martindale method

Maintenance



06EX Light Beige



26EX Sand



21EX Blue



17EX Navy



10EX Aubergine



Acrylic 33% Viscose 25% Wool 17% Polyester 14% Cotton 11%

Lightfastness

ISO 3/4

Abrasion

30,000 rubs DIN EN ISO 12947-2

Maintenance



01ESO White



81ESO Avio



Acrylic 33% Viscose 32% Wool 16% Polyester 8% Cotton 7% Flax 4%

Flame Resistance

California Technical Bulletin 117-2013 British Standard 5852: 1979 Part1 (cigarette & match)

Abrasion

50,000 rubs Martindale method

Maintenance

Dry clean, only



01CU White



02CU Ivory



05CU Mustard




04CU Brown



06CU Green



08CU Burgundy



07CU Blue



03CU Dark Grey

Crumble

Knoll

Content

Polyester 29% Wool 25% Acrylic 25% Cotton 21%

Lightfastness

ISO 4

Abrasion

70,000 rubs Martindale method

Maintenance

Clean with solvent-based cleaning agent



Please use this sample card as indicative, only. It is provided as a guide. There may be variations between this sample card and the real samples.



Viscose 76% Cotton 13% Flax 8% Nylon 3%


Lightfastness

ISO 4/5

Abrasion

100,000 rubs Martindale method

Maintenance

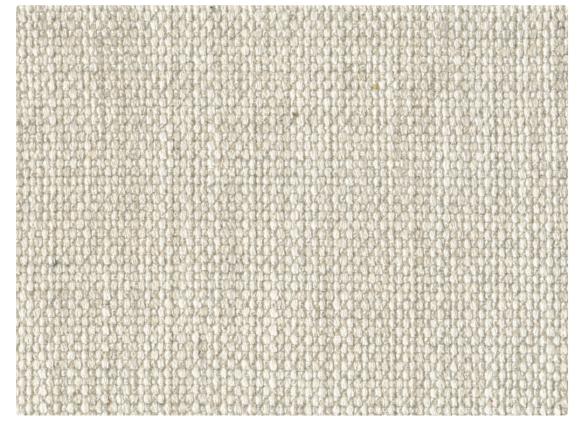

02CI Ivory



03CI Sand



04Cl Dark Brown



01Cl Steel




06Cl Teal



05Cl Alp Green



09Cl Bordeaux



08CI Ginger



07Cl Lemon Curry



Rayon 48% Polyester 36% Cotton 16%

Flame Resistance

California Technical Bulletin 117 NFPA260 (UFAC class 1) EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)


Lightfastness

ISO 4

Abrasion

40,000 rubs Martindale method

Maintenance

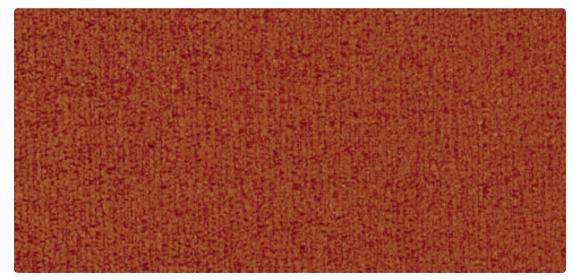

K10546 Brick



K10541 Ivory



K10542 Camel





K10544 Blue



K10545 Leaf



K10547 Olive



K10548 Bordeaux



K10549 Red



K105410 Taupe



K105411 Brown



K105412 Charcoal



K105413 Black





Pile:
Alpaca 60%
New Wool 27%
Nylon 13%
Ground:
Cotton 70%
Polyester 19%
Viscose 11%

Flame Resistance

BS 5852:2006

Lightfastness

ISO 4

Abrasion

40,000 rubs Martindale method


Maintenance




01AL Ivory



02AL Beige



1103AL Red




601AL Purple



1107AL Ice



11AL Dark Grey



12AL Black



09AL Green



1114AL Taupe



Content Polyester 100%





KnollTextiles Archival Collection, 1970

Content

Ground: cotton 54% Pile: mohair 46%

Flame Resistance

California Technical Bulletin 117 NFPA 701 Test 1 (1996) with topical treatment EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)


Lightfastness

ISO 5

Abrasion

20,000 rubs Martindale method

Maintenance

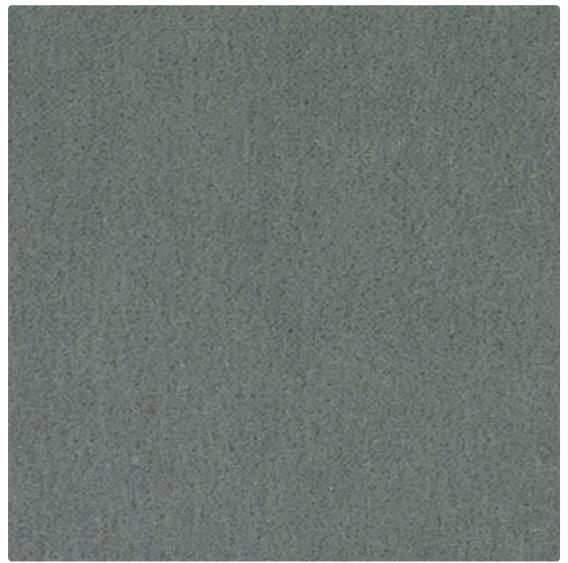

K78487 Swan





K78470 Palomino



K78471 Silver



K78460 Sandstone



K78449 Sage



K78485 Penny





KnollTextiles Archival Collection, 1970

Content

Ground: cotton 54% Pile: mohair 46%

Flame Resistance

California Technical Bulletin 117 NFPA 701 Test 1 (1996) with topical treatment EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)

Lightfastness

ISO 5

Abrasion

20,000 rubs Martindale method

Maintenance



K78474 Moss



K78463 Marina



K78448 Graphite



K78476 Tomato



K78483 Bayberry



K78482 Currant



K78462 Clove



K78481 Teal



K78484 Aviator



K78434 Wine



K78479 Espresso



K78486 Truffle



K78466 Ebony



Wool 86% Rayon 14%

Flame Resistance

California Technical Bulletin 117 EN1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)


Lightfastness

ISO 5

Abrasion

80,000 rubs Martindale method

Maintenance

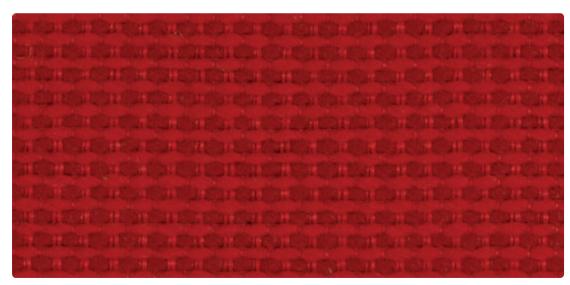

H80019 Fire Red




H80040 Orange



H80050 Natural



H80012 Ivory



H80051 Yellow



H80041 Green



H80042 Blue



H8002 Sand



H80043 Brown



H80044 Grey



H80052 Hot Pink





Polyester microfiber 49% (30% plant based) Polyester 31% Polyurethane 20%

Flame Resistance

NFPA 260 (UFAC Class 1) ASTM E-84 (Adhered) Class A ASTM E-84 (Unadhered) Class A EN 1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)

Lightfastness

AATCC 16E, 40 hours, Class 5

Abrasion

200.000 double rubs Wyzembeek method

Maintenance



K102115 Alpine



K102124 Tapioca



K102126 Cement



K102125 Pebble



K10218 Poppy



K102139 Ruby Red



K102131 Petal



Ultrasuede®



Content

Polyester microfiber 49% (30% plant based) Polyester 31% Polyurethane 20%

Flame Resistance

NFPA 260 (UFAC Class 1) ASTM E-84 (Adhered) Class A ASTM E-84 (Unadhered) Class A EN 1021 1/2 British Standard 5852: 1990 Source 5 (crib 5)

Lightfastness

AATCC 16E, 40 hours, Class 5

Abrasion

200.000 double rubs Wyzembeek method

Maintenance



K102128 Ray



K102134 Tinted Gold



K102141 Tamarind



K102118 Kiwi





K102140 Plum



K102132 Vermillion



K102137 Cerulean



K102113 Placid



K102129 Mink



K102133 Chinchilla



K102120 Silver



K102121 Flannel



K102122 Black Onyx



Viscose 42% Flax 34% Acetate 20% Nylon 2% Polyester 2%

Lightfastness ISO 4/5

Abrasion

90,000 rubs Martindale method

Maintenance



02AN Natural




03AN Ivory



05AN Sand





08AN Pearl



09AN Sea Water



10AN Graphite



12AN Terracotta



20AN Marine











