

# NELSON WALL SCONCE

PRODUCT FACT SHEET



1

**HAY**

## NELSON WALL SCONCE


DESIGN FOR HERMAN MILLER, AVAILABLE FROM HAY, 1947

Designed by pioneering American designer George Nelson in 1947, and first produced in 1952, the Bubble Lamp signaled a revolution in the Modernist lighting industry. Available in an assortment of organic sizes and shapes, these elegant orbs were inspired by a set of silk-covered Swedish pendant lamps Nelson wanted for his office, but found to be too expensive. Employing the resourcefulness that characterized his working process, he decided to use a self-webbing plastic spray developed by the U.S. military, and applied it over a lightweight, rounded-steel frame to produce these soft, glowing fixtures.


### HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A family of refined wall sconces.
- CE approved.
- Suitable for both private and office environments.


### DIMENSIONS




NELSON BALL WALL SCONCE CABLED | SMALL  
DIAMETER SHADE 32,5 CM | 12.8"  
DEPTH 53,5 CM | 21.06"  
HEIGHT SHADE 30,5 CM | 12"  
HEIGHT TOTAL 42.5 CM | 16.73"



NELSON CIGAR WALL SCONCE CABLED | SMALL  
DIAMETER SHADE 26,5 CM | 10.43"  
DEPTH 50,5 CM | 19.9"  
HEIGHT SHADE 35,5 CM | 12"  
HEIGHT TOTAL 42.5 CM | 14"



NELSON PEAR WALL SCONCE CABLED | SMALL  
DIAMETER SHADE 33 CM | 13"  
DEPTH 53 CM | 20.9"  
HEIGHT SHADE 32 CM | 12.6"  
HEIGHT TOTAL 42.5 CM | 16.73"

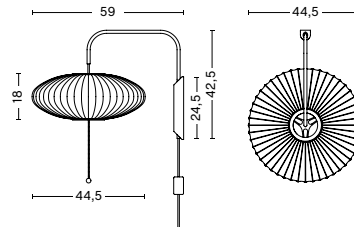

NELSON SAUCER WALL SCONCE CABLED | SMALL  
DIAMETER SHADE 44,5 CM | 10.43"  
DEPTH 59 CM | 23.23"  
HEIGHT SHADE 18 CM | 7.1"  
HEIGHT TOTAL 42.5 CM | 16.73"

### MATERIALS

#### SHADE

Webbing polymer.

#### FRAME TOP & BOTTOM RING

Coated and brushed metal and nickel.

#### CORD

White PVC insulation.

All Bubble Lamp models have a steel-wire skeleton on the interior which is spray coated with the translucent plastic polymer resulting in a lamp that is both opaque and transparent as it glows.

## TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	POWER (WATTS)	DIMMABLE	POWER SUPPLY	CORD LENGTH	SWITCH
LED E27 (A15)	5-8W	No	220-240V AC at 50/60Hz polarized plug and cable included.**	366 cm	Pull switch

\*Bulb not included.

\*\*EU/UK adaptors not included.

## TEST SPECIFICATIONS\*

FLUX (LUMENS)	CCT (KELVIN) & CRI (1-100)
500-800lm	The levels will vary depending on the type of bulb used in the lamp.

\*Photometrics and the specification shown is taken using the recommended LED bulbs fitted in the production luminaire.

## CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

**LED**  IP20  

Tested according to the following european EN IEC standards which relate specifically to electrical lighting products including

- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)

## COUNTRY OF ORIGIN

USA

## DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

**LINK TO DIGITAL LIBRARY**