


Flo Clamp

design Foster + Partners, 2013

release 2019, December



LED clamp lights, in varnish coated aluminium and steel, to be mounted on surfaces like desks, shelves, etc. with an arm pivoting on its base by 360°. Its head rotates by 300°. Lighting source is a 6W-LED, which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 95501ST00

○ Matt white
cod. 95502OP00

● Brushed nickel
cod. 9554400

Special

● Matt red
cod. 95503OP00

● Matt yellow
cod. 95505OP00

● Metallic bronze
cod. 95529MT00

● Gunmetal
cod. 9553200

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 520 lm
- Emitted flux: 370 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts




- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 0,8 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
69 x 47 x 8 (cm)
0,024 m³


Gross weight
1,8 Kg

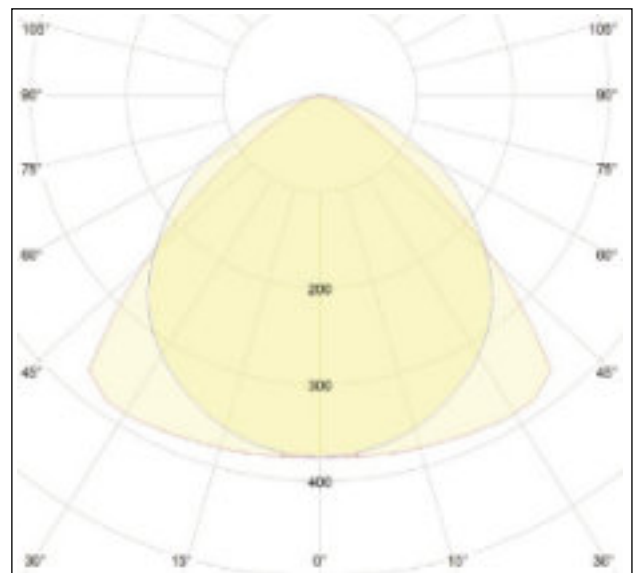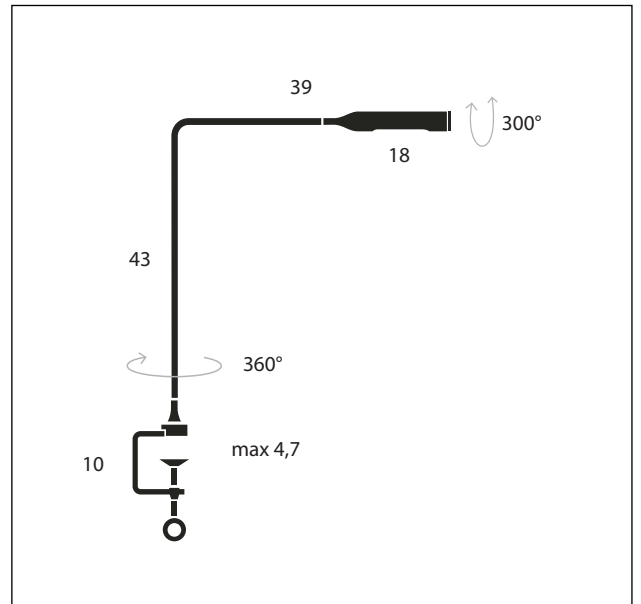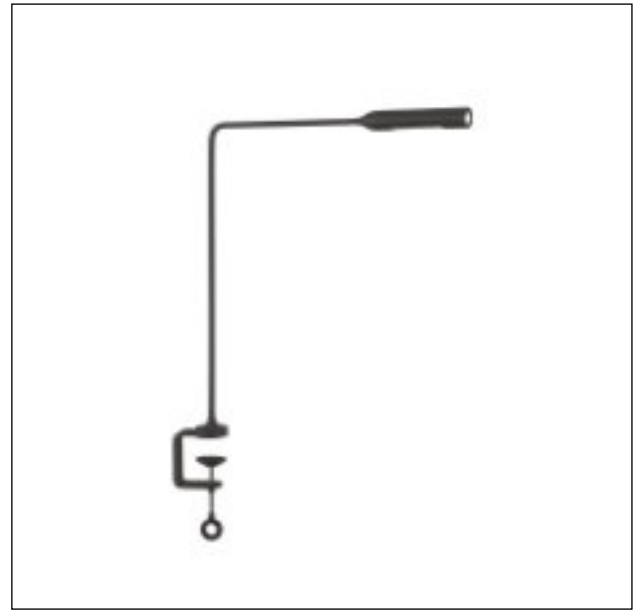

Flo Clamp

design Foster + Partners, 2013

release 2019, December



LED clamp lights, in varnish coated aluminium and steel, to be mounted on surfaces like desks, shelves, etc. with an arm pivoting on its base by 360°. Its head rotates by 300°. Lighting source is a 6W-LED, which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 95501STK27

○ Matt white
cod. 95502OPK27

● Brushed nickel
cod. 95544K27

Special

● Matt red
cod. 95503OPK27

● Matt yellow
cod. 95505OPK27

● Metallic bronze
cod. 95529MTK27

● Gunmetal
cod. 95532K27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 500 lm
- Emitted flux: 355 lm
- Efficacy: 39,4 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 0,8 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
69 x 47 x 8 (cm)
0,024 m³


Gross weight
1,8 Kg

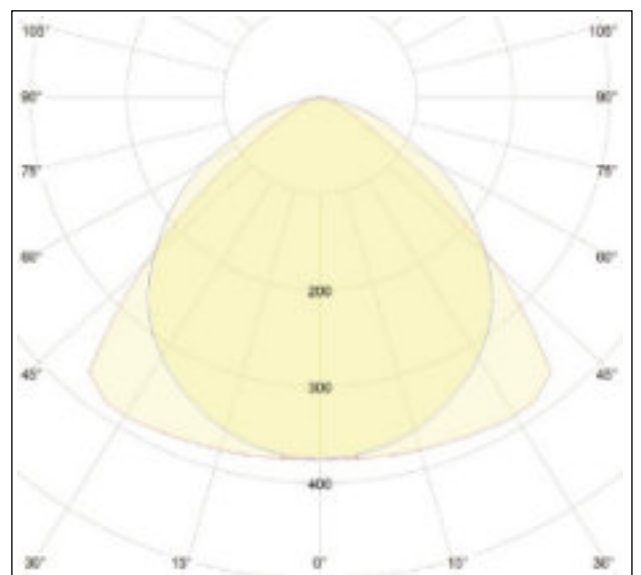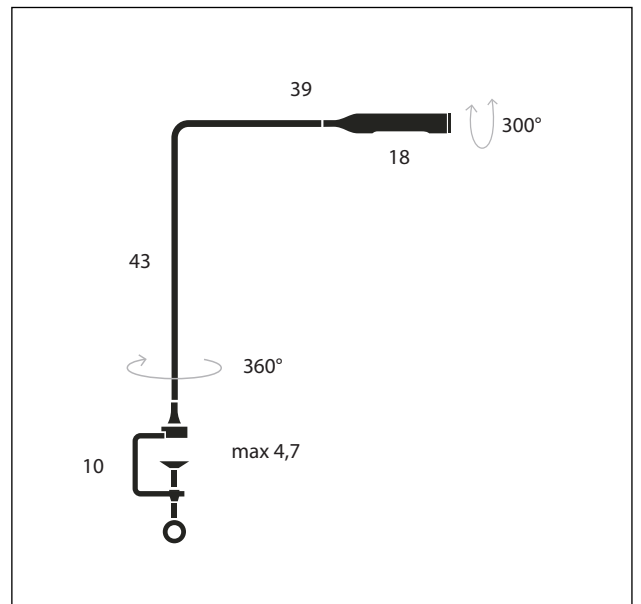

Flo Clamp

design Foster + Partners, 2013

release 2019, December



LED clamp lights, in varnish coated aluminium and steel, to be mounted on surfaces like desks, shelves, etc. with an arm pivoting on its base by 360°. Its head rotates by 300°.
Lighting source is a 6W-LED, which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 95501ST00ETL

○ Matt white
cod. 95502OP00ETL

● Brushed nickel
cod. 9554400ETL

Special

● Matt red
cod. 95503OP00ETL

● Matt yellow
cod. 95505OP00ETL

● Metallic bronze
cod. 95529MT00ETL

● Gunmetal
cod. 9553200ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 520 lm
- Emitted flux: 370 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 0,8 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
69 x 47 x 8 (cm)
0,024 m³


Gross weight
1,8 Kg

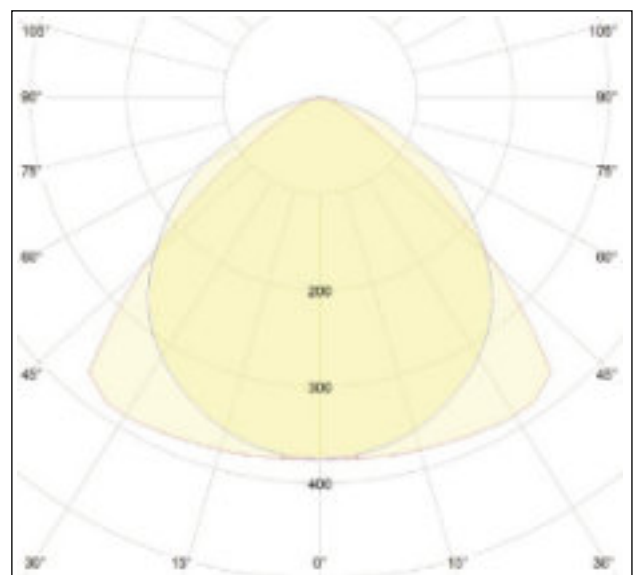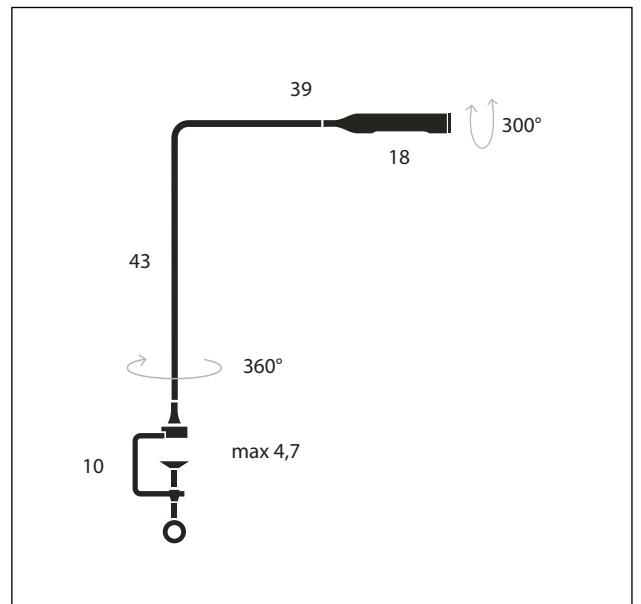

Flo Clamp

design Foster + Partners, 2013

release 2019, December



LED clamp lights, in varnish coated aluminium and steel, to be mounted on surfaces like desks, shelves, etc. with an arm pivoting on its base by 360°. Its head rotates by 300°. Lighting source is a 6W-LED, which you can switch on with one click for full light intensity, with two clicks for half light intensity.

Finishing

Standard

● Black soft touch
cod. 95501STK27ETL

○ Matt white
cod. 95502OPK27ETL

● Brushed nickel
cod. 95544K27ETL

Special

● Matt red
cod. 95503OPK27ETL

● Matt yellow
cod. 95505OPK27ETL

● Metallic bronze
cod. 95529MTK27ETL

● Gunmetal
cod. 95532K27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 500 lm
- Emitted flux: 355 lm
- Efficacy: 39,4 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 0,8 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging
cardboard box
69 x 47 x 8 (cm)
0,024 m³

Gross weight
1,8 Kg

